



- **21,5"** Industrial **MetalCase Monitor (16:9)**
- Resolution:  
**Full HD (1920x1080)**
- **Touch** or **w/o -Touch** version  
with USB or RS232 driver interface connection
- Two Power options available:  
**18 ~ 36V, VDC** or **80 ~ 265V, VAC**
- **VESA 100x100 + 200x100**

**IMC-215X**  
Made in ITALY



## DISPLAY

|                             |                     |
|-----------------------------|---------------------|
| <b>Size:</b>                | 21,5"               |
| <b>Resolution:</b>          | Full HD (1920x1080) |
| <b>Aspect Ratio:</b>        | 16:9                |
| <b>Backlight:</b>           | Led                 |
| <b>Bright and Contrast:</b> | 250 cd/mq 1000:1    |
| <b>Colors:</b>              | 16 M                |
| <b>View Angle:</b>          | 170° - 160°         |

## FRONT PANEL

|                          |                     |
|--------------------------|---------------------|
| <b>Thickness:</b>        | 2 mm                |
| <b>Graphic:</b>          | Black painted steel |
| <b>Front Panel Type:</b> | MetalCase           |

## TOUCH SCREEN

(Only with Touch Version)

|                         |                   |
|-------------------------|-------------------|
| <b>Glass Thickness:</b> | 3 mm              |
| <b>Technology:</b>      | Resistive 5 wires |
| <b>Connection Type:</b> | USB 2.0 or RS232  |

## I/O INTERFACE

|                     |                                                                      |
|---------------------|----------------------------------------------------------------------|
| <b>Video Input:</b> | 1x DVI-I<br>1x VGA (D_SUB 15pin)                                     |
| <b>USB ports:</b>   | 1x USB 2.0 or RS232<br>for Touch Driver<br>(Only with Touch Version) |

## POWER

|                   |                                                 |
|-------------------|-------------------------------------------------|
| <b>Power in:</b>  | 18 ~ 36V, VDC Version<br>80 ~ 265V, VAC Version |
| <b>Max power:</b> | 25W max                                         |

## MECHANICAL

|                       |                        |
|-----------------------|------------------------|
| <b>Material:</b>      | Steel                  |
| <b>IP Protection:</b> | IP40                   |
| <b>Dimensions:</b>    | (W)520x(D)312x(H)72mm  |
| <b>Weight:</b>        | 8 Kg                   |
| <b>Mounting:</b>      | VESA 100x100 + 200x100 |

## ENVIRONMENT

|                         |                                       |
|-------------------------|---------------------------------------|
| <b>Operating temp.:</b> | 0°C ~ 50°C                            |
| <b>Storage temp.:</b>   | -20°C ~ 70°C                          |
| <b>Humidity:</b>        | 40% ~ 60% Humidity,<br>non-condensing |
| <b>EMC:</b>             | CE, FCC, RoHS, LVD                    |

## SARC ITALIA SRL


Strada Albareto, 503 - 41122 Modena - ITALY  
Tel. +39 059 8751076 Fax. +39 059 8751025



Website: [www.indatech.it](http://www.indatech.it)

Email: [info@indatech.it](mailto:info@indatech.it)

# INDATECH®

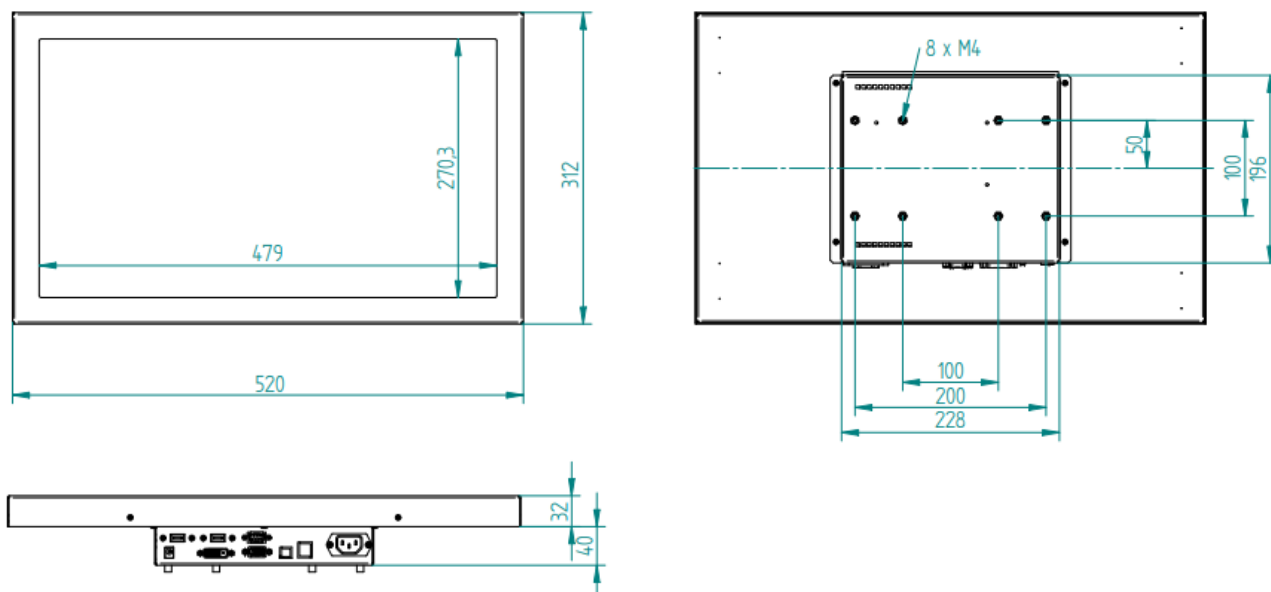

## Accessories Included:

- 1x Power Cable
- 1x VGA Cable or 1x DVI-I Cable
- 1x USB 2.0 Cable

## ORDER CODE:

Contact your sales representative for configuration.

## **SARC ITALIA SRL**

Strada Albareto, 503 - 41122 Modena - ITALY  
Tel. +39 059 8751076 Fax. +39 059 8751025



Website: [www.indatech.it](http://www.indatech.it)

Email: [info@indatech.it](mailto:info@indatech.it)